

► Features

- Illuminated LED integrated
- Through-in and surface mount mount
- 500,000 long-life cycles
- Various bi-color and RGB LED color optional
- Custom legends is available



► Applications




Panel control that requires tactile switch with illumination integrated.
Popular for applications in audio, industrial, medical, communication

► Specification


MPN	TS7 series
Power Rating	12 VDC at 50mA
Insulation Resistance	100MΩ
Dielectrical Strength	250VAC for 1-minute
Operating Force	160gf/250gf
Travel	0.25+/-0.1mm
Function	Momentary

► Dimension


TS7-0000RGBA

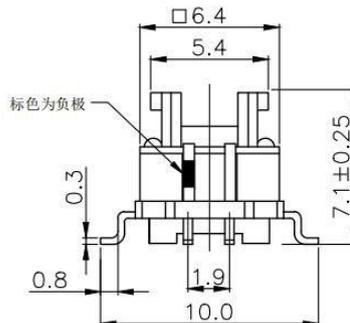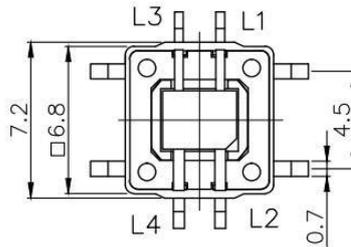

TS7-0000RGB

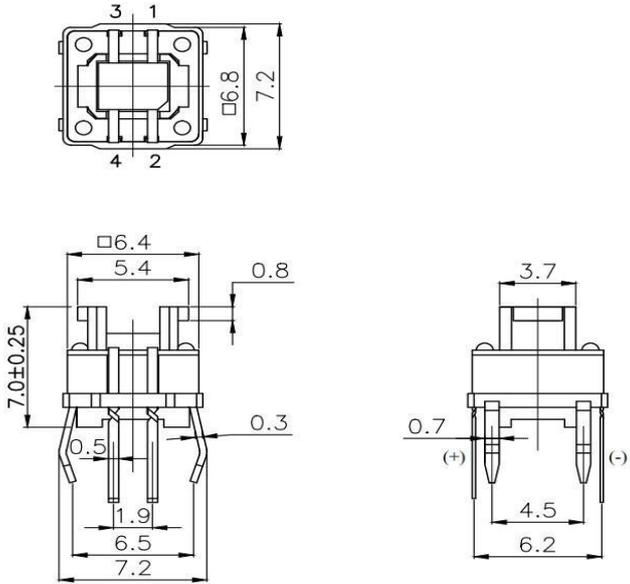

TS7-0051BRGA6

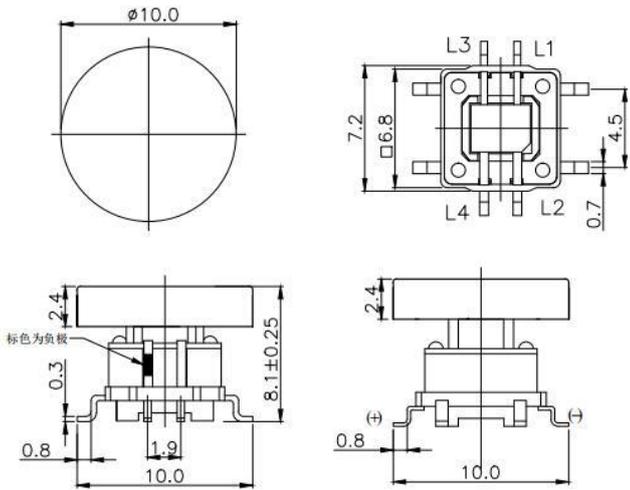

TS7-0051BRG6

