

► Features

- Illuminated LED integrated
- Through-in and surface mount mount
- 500,000 long-life cycles
- Various single and bi-color LED optional
- Custom legends is available



► Applications

Panel control that requires tactile switch with illumination integrated.


Typical for applications in pro audio&video, industrial, medical, security device, communication

► Specification



MPN	TS9 series
Power Rating	12 VDC at 50mA
Insulation Resistance	100MΩ
Dielectrical Strength	250VAC for 1-minute
Operating Force	160gf/250gf
Travel	0.25+/-0.1mm
Function	Momentary

► Dimension



TS9-0000WA

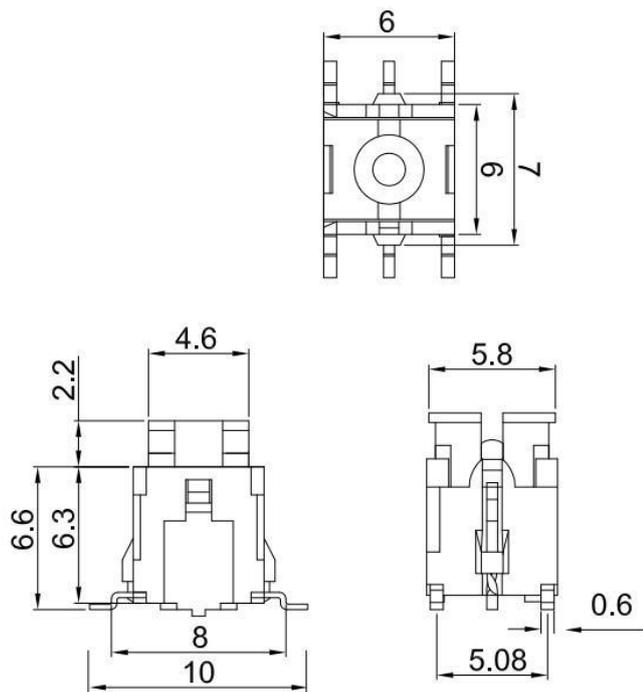



TS9-0000R

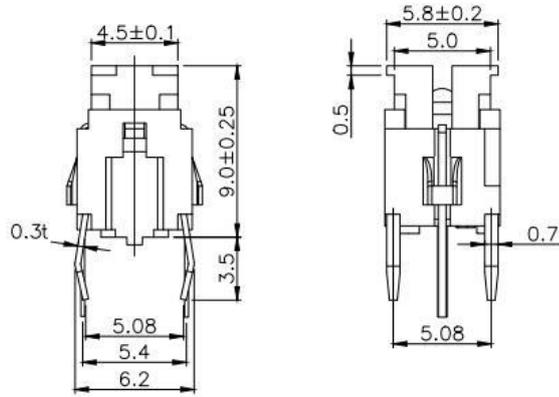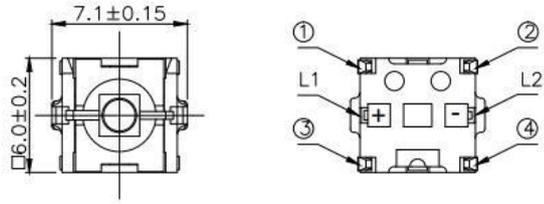


TS9-003BW1

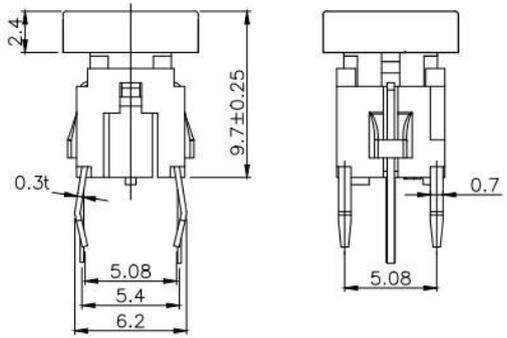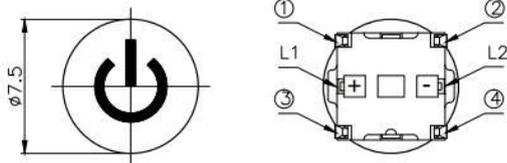


TS9-001AU1

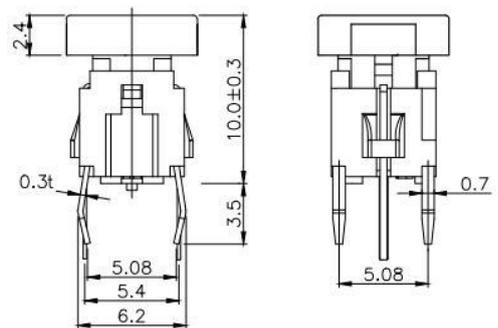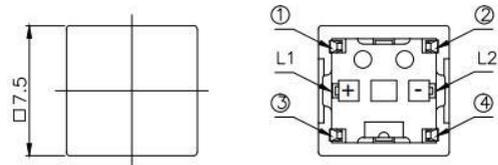


TS9-005AU6

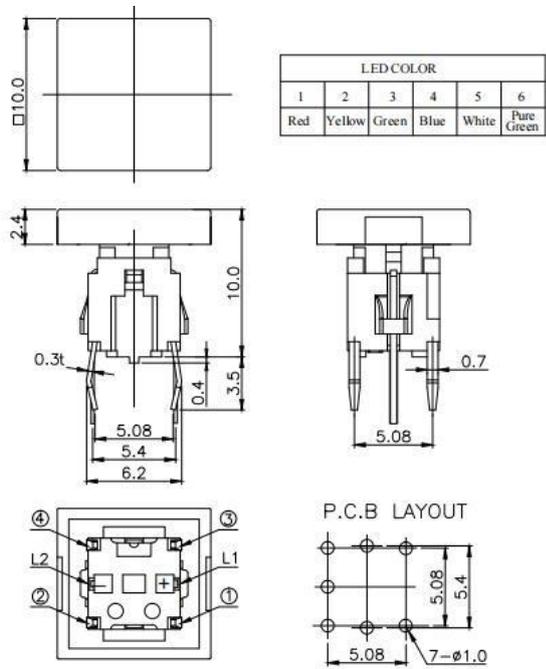


TS9-007AU3

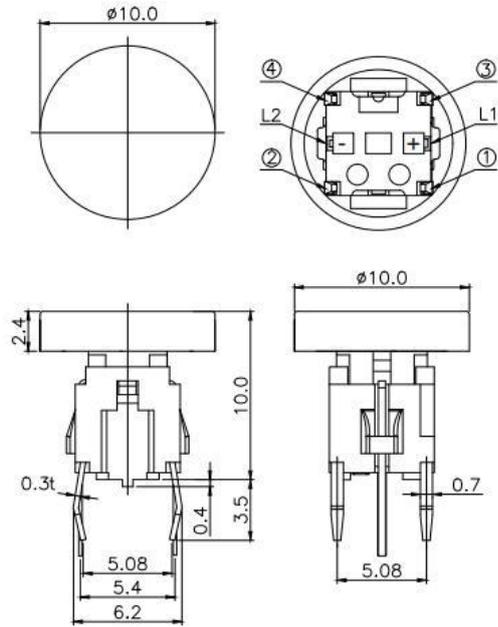


TS9-009AU1

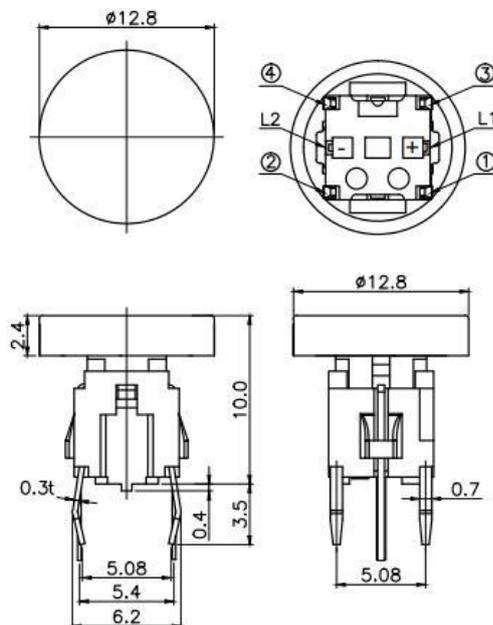


TS9-5B7BU1

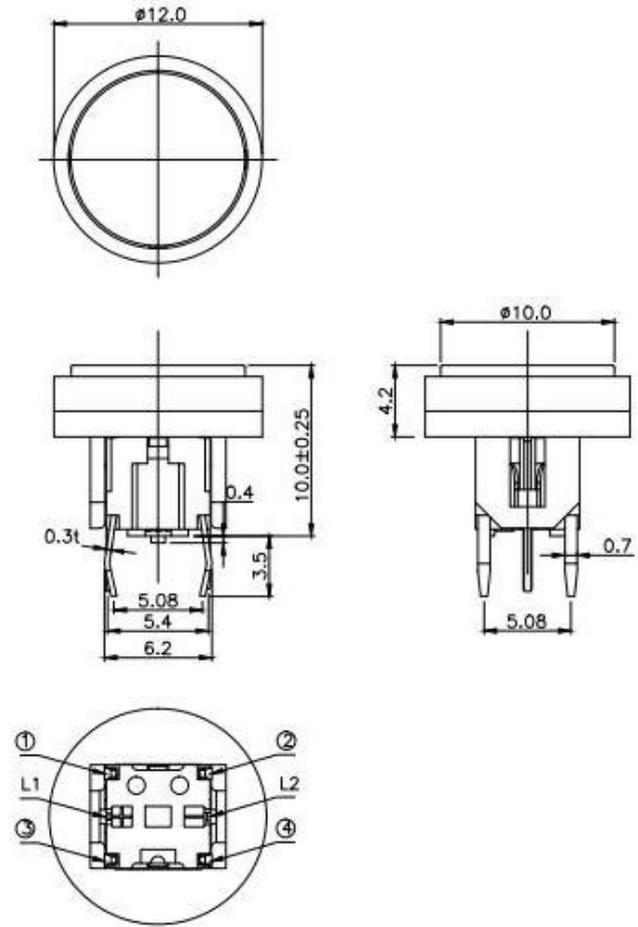

TS9-2A2AR

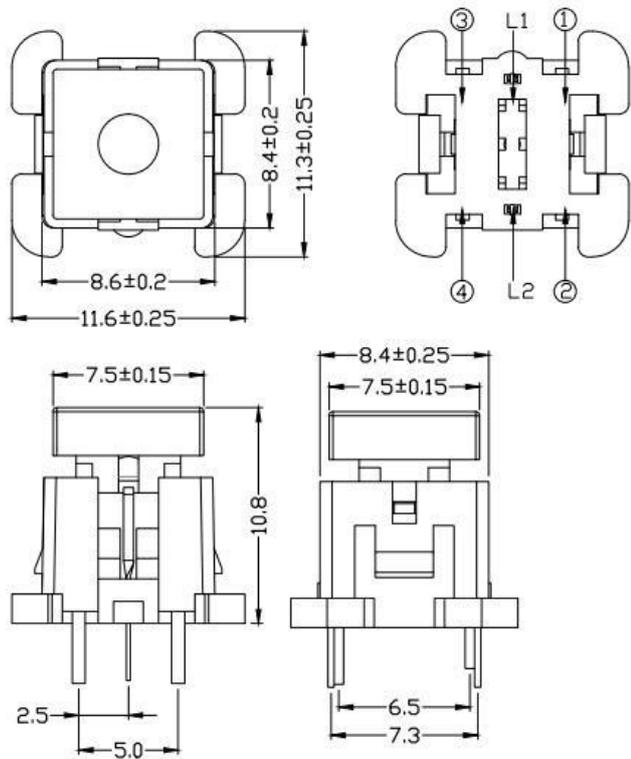

TS9-0012WU

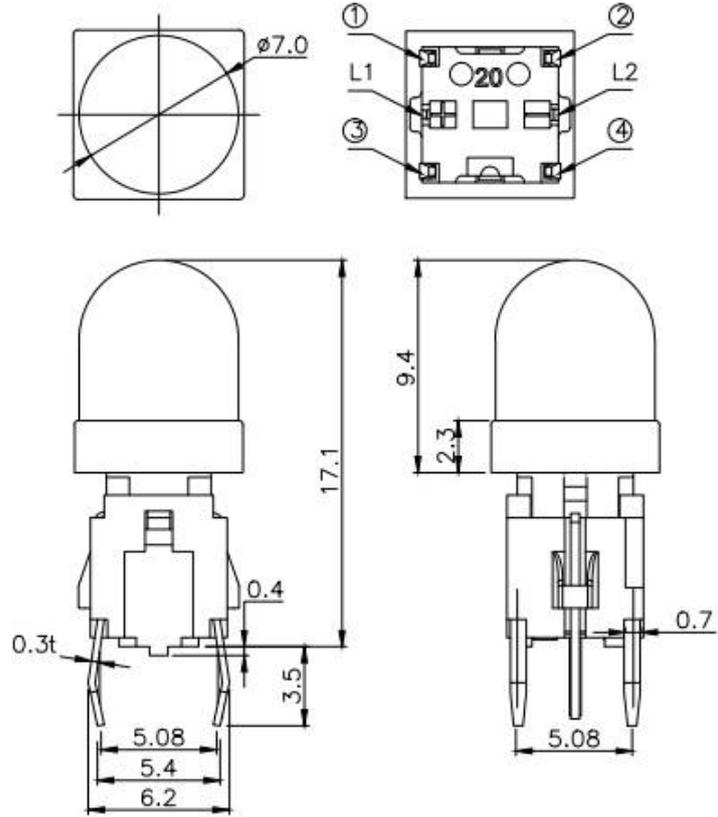

TS9-00TBU1

